



Spot Light for Co-axial lens

Ideal co-axial spot lighting for telecentric lens illumination

Ultra-compact design for space-constrained machine vision applications

Hot spot effect is alleviated with uniform lighting even at low magnifications




12V type

Series	Model No.	Color	Dimension of Lighting Area (mm)	Power Consumption	Drawing
VS-LEV Series	VS-LEV12-14L/R-H	Red	8	0.84W/12V	VS-LEV-14/*
	VS-LEV12-14L/W-H	White			
	VS-LEV12-14L/B-H	Blue			
	VS-LEV12-14L/G-H	Green			
	VS-LEV12-14L/IR	IR			


24V type

Series	Model No.	Color	Dimension of Lighting Area (mm)	Power Consumption	Drawing
SP Series	U-SPR	Red	8	24V/0.41W	U-SP*
	U-SPW	White	8	24V/0.41W	
	U-SPB	Blue	8	24V/0.41W	
	U-SPG	Green	8	24V/0.41W	
	U-SPRC	Red	8	24V/1.2W	U-SP*C
	U-SPWC	White	8	24V/1.2W	
	U-SPBC	Blue	8	24V/1.2W	
	U-SPGC	Green	8	24V/1.2W	


VS-LEV-14/*

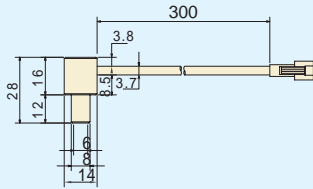

U-SP*

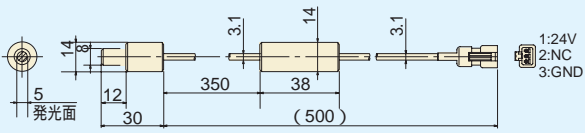

U-SP*C

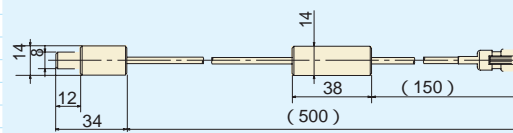

All dimensions in mm

